

AKRON SELF

Static or ventilated
refrigeration wall site display cabinet
for dairies, drinks, ice-cream
and frozen food



- Models available: **140 / 200**
- Static refrigeration (lower section)
and ventilated refrigeration (top section)
- Ideal for the display of chilled e frozen food
- A display cabinet with innovative design
- The two display compartments have independent temperature
zones allowing the display of ice cream and frozen foods
as well as drinks and dairy products
- Electric defrost (TB)
- Off-cycle defrost (TN)
- Shelf width: 405 mm
- Display unit width: 690 mm
- Refrigerant R404A
- Sliding lids (optional)
- Sliding night covers (optional)
- Divisors for refrigerated room (optional)
- Bumper in PVC
- Akron Self is available in two versions: **STD and COLOURS**

COLOURS VERSION



AKRON SELF 200 STD

AKRON SELF

DESIGN

AKRON SELF allows to display in a practical and functional way your products, thanks to its innovating design. Each AKRON SELF part has been designed paying the maximum attention to the aesthetic, without losing functionality.

TECHNICAL

AKRON SELF, has been produced using high technology and innovating technical solutions to guarantee optimum performances over time.


QUALITY

To us quality means flexible design, perfection in the details and total reliability over the time. Such goals can be obtained only through professionalism and passion of hundreds ISA men, continuously working to increase the levels of customers' satisfaction.

Static or ventilated refrigeration wall site display cabinet for dairies, drinks, ice-cream and frozen food



REFRIGERATION ARCHITECTURE

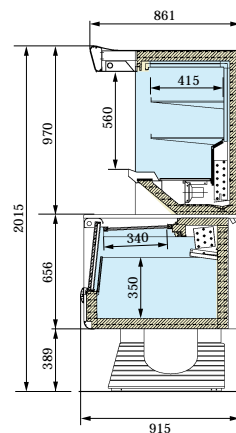

AKRON SELF 140/200 TB-TN



bumper in PVC



Colours version

Technical characteristics

	140 TB-TN	200 TB-TN
LxDxH mm	1420X915X2015	2040X915X2015
Capacity (gross/net) litres	396+297/383+295 (base/upper structure)	579+444/560+438 (base/upper structure)
Refrigeration	static (TB) ventilated (TN)	static (TB) ventilated (TN)
Defrosting	electric (TB) Compressor stop (TN)	electric (TB) Compressor stop (TN)
Product temperature °C (EN441-5)	-18/-15 (TB) +2/+5 (TN)	-18/-15 (TB) +2/+5 (TN)
Electrical input (standard) W/A	1650/8,1	2600/12,1
Electrical input (defrosting) W/A	1050/4,7	2040/9,2
Net weight Kg	308	412



Sistema di Qualità
ISO 9001
 Cert. C15Q/CSQ 9105,ISA 1
 cisa Net esg
 ISA S.p.A.
 Via del Lavoro, 5
 06083 BASTIA UMBRA (PG) ITALY
 Tel. 075-80171 - Fax 075-8000900
<http://www.isaitaly.com>