

TORNADO

Upright showcase
static or ventilated refrigeration
suitable for sale of drinks,
fresh products, ice-cream or frozen food



Modern design, high performance
and excellent build quality make TORNADO
an ideal means to display and sell your
product in the best possible way.



TORNADO 50 RV TN



TORNADO 40 RS TB

- Models available:
Positive temperature: TN 40 RS, TN 40 RV, TN 50 RV
Low temperature: TB 40 RS, TB 50 RV
Low temperature/Positive temperature TB/TN 50 RV
- Static refrigeration: RS or Ventilated refrigeration: RV
- Refrigerant R 404A
- Control board with hinged cover
- Monolithic body foamed at high density for a better resistance over time
- 6 cm maxi insulation to reduce electric consumption
- Maximum visibility thanks to the large glass surface
- Optimum relation between footprint and display capacity
- Model 50 RV with over 530 litres maximum display capacity
- Triple-glazed glass door to prevent condensation
- Door with aluminium frame to withstand numerous openings over time
- Self-closing door
- Decompression valve for easier consecutive door openings on RV models
- Large ergonomic handle for an easier grip
- Adjustable shelves, except on models RS TB
- Double upright lighting tube for uniform illumination over the whole display area
- Light box
- 4 rollers e 2 stabilising feet for easy movement and positioning
- Personalisation on request



TORNADO 40 RS TN



TORNADO 40 RV TN



TORNADO 50 RV TB

TORNADO

■ QUALITY

To us quality means flexible design, perfection in the details and total reliability over the time. Such goals can be attained only through professionalism and passion of hundreds ISA men, continuously working to keep our customers' satisfaction up.

■ OPTIONALS

Internal grid with supports (532x410) Tornado 40 RV RS
Internal grid with supports (532x505) Tornado 50 RV



Tempered triple-glazed glass




Maximum visibility of the product


Upright showcase
static or ventilated refrigeration
suitable for sale of drinks,
fresh products, ice-cream or frozen food




REFRIGERATION ARCHITECTURE

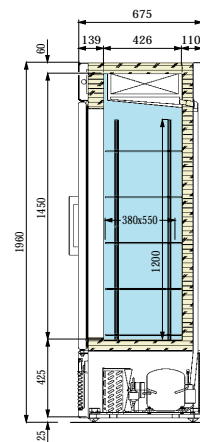


TORNADO 40 RS TN

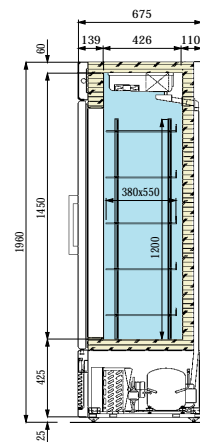


TORNADO 40 RV TN

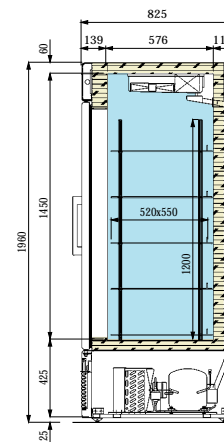

TORNADO 50 RV TN

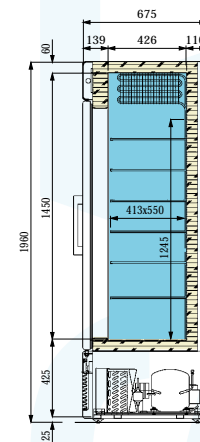

TORNADO 40 RS TB

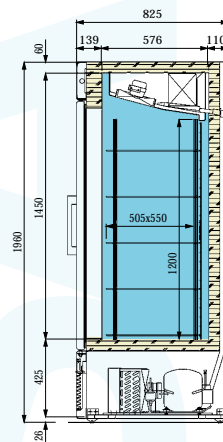

TORNADO 50 RV TB - 50 RV TB/TN



Personalisation on request



Technical features

	40 RS TN	40 RV TN	50 RV TN	40 RS TB	50 RV TB	50 RV TB/TN
LxDxH mm	670x675x1960	670x675x1960	670x825x1960	670x675x1960	670x825x1960	670x825x1960
Product temperature °C (Cl 4 30°-55%U.R.)	-1/+5	-1/+5	-1/+5	-18	-18/-16	-18/-16 -1/+5
Climatic Class N°/°C%U.R.	4(30/55)	4(30/55)	4(30/55)	3(25/60)	4(30/55)	4(30/55)
Gross Capacity/net litres	400/265	400/260	530/335	400/285	530/335	530/335
Defrosting	compressor stop	compressor stop	compressor stop	manual	hot gas	hot gas
Control panel	electro-mechanical	electro-mechanical	electro-mechanical	electro-mechanical	electronic	electronic

Due to the quality advancement programmes and continuous scientific research ISA reserves the right to modify any technical specifications without notice.

ISA S.p.A.
Via del Lavoro, 5
06083 BASTIA UMBRA (PG) ITALY
Tel. 075-80171 - Fax 075-8000900
<http://www.isaitaly.com>

702413 C. 02 - 1/000