

ISETTA LX

ISETTA LX represents the ideal means for the sale of ice-cream thanks to its exclusive design with the minimum of detail and to the extreme reliability of ISA.

Ice cream cabinet
at static refrigeration
and curved glass



REFRIGERATION ARCHITECTURE



ISETTA 7R LX

- Models available: **LX** 4-6R-7R **LX TP** 4-6R-7R-9R-12R
STD 4-6R-7R-9R-12R **STD TP** 4-6R-7R
- Modern design ideal for impulse sales
- Automatic defrost
- Refrigerant R404A
- Isetta is available also in powered version TP climatic class 4 (+30°C / 70%U.R.)
- Internal lighting canopy
- Rear pivoting door
- Evaporator drip-tray in 18/8 stainless steel
- Antiscratch evaporator grill for protection
- Depth display unit giving the possibility of putting a second row of containers under the top one
- Unit display width 460 mm
- Display unit base in polyurethane insulated for a better distribution of temperature
- Refrigerated storage compartment on 6R-7R-9R-12R
- Door of the storage compartment with rounded handle for an easier grip
- Double pivoting casters
- Switch on/off, light switch
- Storage compartment switch on 12R model
- Personalisation on request



ISETTA STD

- Straight glass version (STD)


ISETTA LX

QUALITY

To us quality means flexible design, perfection in the details and total reliability over the time. Such goals can be obtained only through professionalism and passion of hundreds ISA men, continuously working to increase the levels of customers' satisfaction.

OPTIONALS


- Cone holder
- Scoop-washer with water tap and console
- S/S container 4,75 (260 x 157 x 170h)
- S/S container 5 (360 x 165 x 120h)
- Kit containers supports lt. 4,75
- Front sticker d1
- Front sticker d2

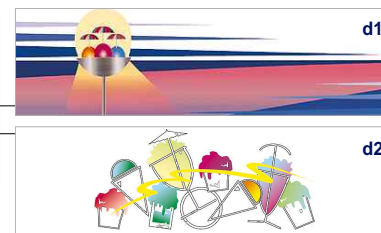


Ice cream cabinet at static refrigeration and curved glass



REFRIGERATION ARCHITECTURE

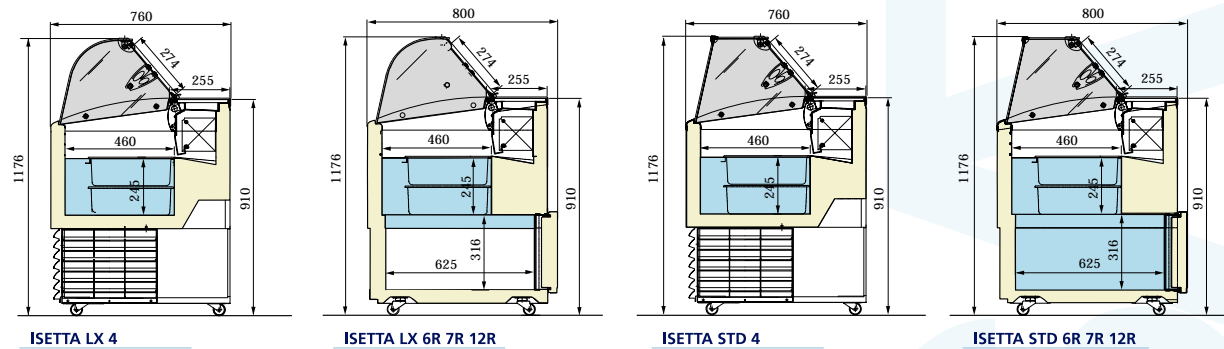

Containers composition

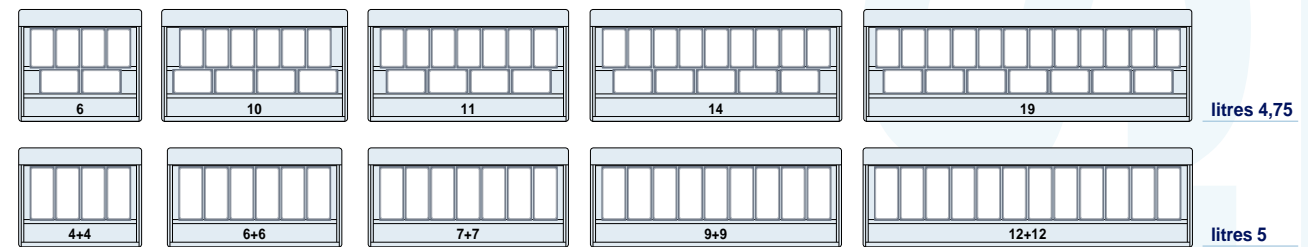

Technical features

	4 STD - LX	6R STD - LX	7R STD - LX	9R STD - LX	12R STD - LX
LxDxH mm	824x760x1176	1184x800x1176	1354x800x1176	1659x800x1176	2119x800x1176
Product temperature °C (Cl 3 25°-60%U.R.)	-16/-14	-16/-14	-16/-14	-16/-14	-16/-14
Containers display capacity nr. containers 5 litres	4+4	6+6	7+7	9+9	12+12
Storage capacity nr. containers litres 5	-	8	12	14	20

Lighting

Due to the quality advancement programmes and continuous scientific research ISA reserves the right to modify any technical specifications without notice.

ISA S.p.A.
Via del Lavoro, 5
06083 BASTIA UMBRA (PG) ITALY
Tel. 075-80171 - Fax 075-8000900
<http://www.isaitaly.com>

701513 C.02 - 12/00