

MISTRAL

Upright showcase with curved door
static or ventilated refrigeration
suitable for sale of drinks,
fresh products, ice-cream and frozen food



High aesthetic quality, high performance
and excellent quality make MISTRAL
an ideal means to differentiate your offer.



MISTRAL 40 RS TB

MISTRAL 50 RV TN


- Models available:
 - Positive temperature (TN) 40 RS, 40 RV, 50 RV
 - Low temperature (TB) 40 RS, 50 RV
 - Dual temperature (TB/TN) 50 RV
- Static refrigeration: RS or ventilated refrigeration: RV
- Refrigerant R404A
- Monolithic body foamed at high density for a better resistance over time
- 6 cm maxi insulation to reduce electric consumption
- Maximum visibility thanks to the large glass surface
- Optimum relation between footprint and display capacity
- Model 50 RV with over 530 litres maximum display capacity
- Triple-glazed glass door to prevent condensation and to reduce energy dispersion and therefore consumption on model TB
- Door with aluminium frame to withstand numerous openings over time
- Self-closing door
- Decompression valve for easier consecutive door openings on RV models
- Fitted handle for an easier and safe grip and without protuberance to disturb the curved aesthetic of the door
- Adjustable shelves, except on models RS TB
- Internal double fluorescent lighting for a better illumination
- Light box
- 4 rollers and 2 adjustable feet for easy movement and positioning
- Personalisation on request



MISTRAL 40 RS TN



MISTRAL 40 RV TN

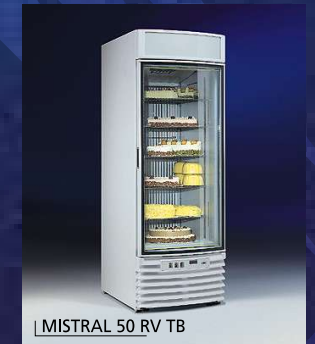

MISTRAL 50 RV TB

MISTRAL

■ QUALITY

To us quality means flexible design, perfection in the details and total reliability over the time. Such goals can be attained only through professionalism and passion of hundreds ISA men, continuously working to keep our customers' satisfaction up.

■ OPTIONALS

Internal grid with support (532x410) Mistral 40 RV
Internal grid with support (532x505) Mistral 50 RV



Tempered triple-glazed glass




Maximum visibility of the product

Upright showcase with curved door
static or ventilated refrigeration
suitable for sale of drinks,
fresh products, ice-cream and frozen food



REFRIGERATION ARCHITECTURE

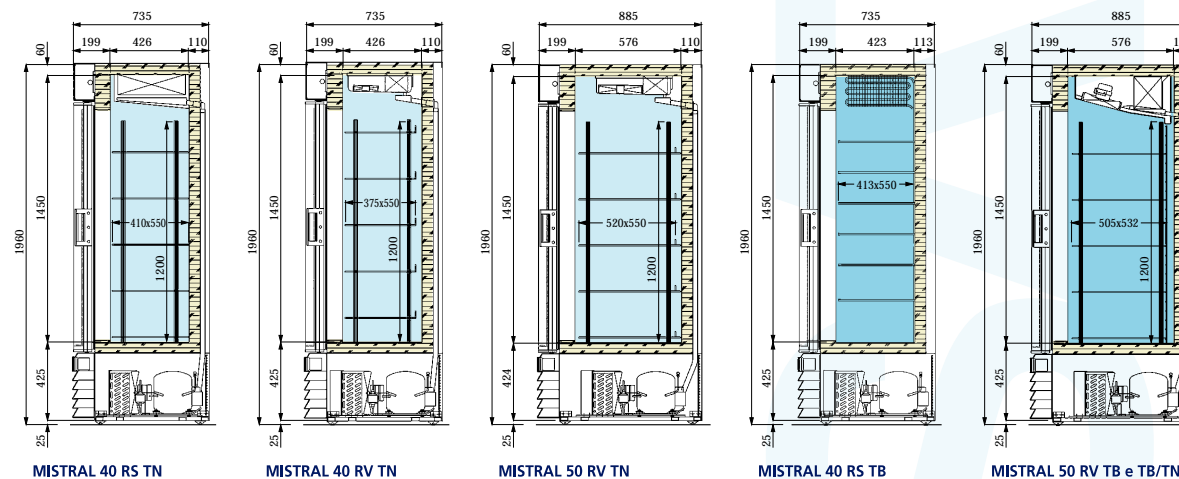

MISTRAL 40 RS TN

MISTRAL 40 RV TN

MISTRAL 50 RV TN

MISTRAL 40 RS TB

MISTRAL 50 RV TB e TB/TN



Personalisation on request

Technical features

	40 RS TN	40 RV TN	50 RV TN	40 RS TB	50 RV TB	50 RV TB/TN
LxDxH mm	670x735x1960	670x735x1960	670x885x1960	670x735x1960	670x885x1960	670x885x1960
Product temperature °C (Cl 4 30°-55%U.R.)	-3/+8	-1/+5	-1/+5	-18	-18/-16	-18/-16
Climatic Class N°/h°C%U.R.	4(30/55)	4(30/55)	4(30/55)	3(25/60)	4(30/55)	4(30/55)
Gross Capacity/net litres	400/265	400/260	530/365	400/285	530/335	530/335
Defrosting	compressor stop	compressor stop	compressor stop	manual	hot gas	hot gas
Control panel	electro-mechanical	electro-mechanical	electro-mechanical	electro-mechanical	electronic	electronic

Due to the quality advancement programmes and continuous scientific research ISA reserves the right to modify any technical specifications without notice.

ISA S.p.A.
Via del Lavoro, 5
06083 BASTIA UMBRA (PG) ITALY
Tel. 075-80171 - Fax 075-8000900
<http://www.isaitaly.com>

702213 C. 02 - 11/00